


Serie Heavy

SR309SI/SR309SE Nylon Cable Chain with Removable Nylon Frame

Inner height (D) 75,5 mm

Construction with sidebands male/female joining system with triple nylon pin. Cover removable from outer radius (SR309SE) or inner radius (SR309SI). Standard chain is equipped with nylon frame every second pitch; on request can be assembled every pitch. Movable separators can be installed to create different compartments.

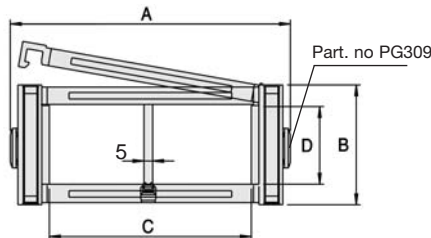

Separator

- Unassembled	Part. no S309S
- Assembled	Part. no S309SMC

Technical characteristics when self-supported

Speed	8 m/s
Acceleration	40 m/s ²

For higher requirements please consult our technical dept.


3

Length of chain (L)

Half travel distance ($\frac{LS}{2}$)

plus length of curve (M)

$$L = \frac{LS}{2} + M$$

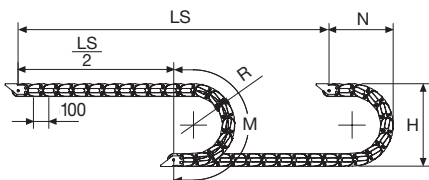

A	B	C	D	R	Weight/m	Chain
mm	mm	mm	mm	mm	kg	Part Number
120	100	64	75,5	200-250-300-350-400-500	4,03	SR309SI(SE)064□□□*
140	100	84	75,5	200-250-300-350-400-500	4,09	SR309SI(SE)084□□□*
165	100	109	75,5	200-250-300-350-400-500	4,17	SR309SI(SE)109□□□*
172	100	116	75,5	200-250-300-350-400-500	4,20	SR309SI(SE)116□□□*
195	100	139	75,5	200-250-300-350-400-500	4,27	SR309SI(SE)139□□□*
235	100	179	75,5	200-250-300-350-400-500	4,40	SR309SI(SE)179□□□*
270	100	214	75,5	200-250-300-350-400-500	4,51	SR309SI(SE)214□□□*
320	100	264	75,5	200-250-300-350-400-500	4,67	SR309SI(SE)264□□□*
370	100	314	75,5	200-250-300-350-400-500	4,83	SR309SI(SE)314□□□*
420	100	364	75,5	200-250-300-350-400-500	4,99	SR309SI(SE)364□□□*

*Complete the code by inserting the value of the radius (R): Ex. SR309SI(SE)116 □□□□
Chain equipped with nylon frame every pitch: complete the code by inserting the letter D.
Ex. SR309SI(SE)116250 □

R	H	N	M
mm	mm	mm	mm
200	500	350	830
250	600	400	985
300	700	455	1145
350	800	500	1300
400	900	555	1460
500	1100	650	1770

